




1425 Highland Avenue (Rt. 10) P.O. Box 728
 Cheshire, CT 06410 - 1216 U.S.A.
 Phone # 203 - 272 - 3234
 Fax # 203 - 271 - 0352
 E - mail: Sales@microtech-inc.com
 Visit our Web site: <http://www.microtech-inc.com>

BROADBAND COAXIAL ROTARY JOINT SPECIFICATIONS

ELECTRICAL REQUIREMENTS								
COAX SIZE	Model No.	Frequency Range GHz	VSWR Max.	Insertion Loss dB	Peak Power	Average Power		
"N"	235323	DC - 12.4	1.50	0.50	10 kW	1 kW		
"SMA"	235324	DC - 18.0	1.60	0.50	3 kW	50 W		
"SC"	233213	2.0 - 6.0	1.35	0.30	15 kW	1 kW		
MECHANICAL REQUIREMENTS								
COAX SIZE	Model No.	Weight Ozs.	"A" Dim.	"B" Dim.		"C" Dim.	"D" Dim.	"E" Holes
"N"	235323	4.5	2.62	0.88		0.12	1.62	.156 Dia. (4 X) 1.25 Dia. B.C.
"SMA"	235324	0.84	1.38	0.50		0.06	1.00	.130 Dia. (3 X) .75 Dia. B.C.
"SC"	233213	5.5	2.25	0.75		0.12	1.62	.156 Dia. (4 X) 1.25 Dia. B.C.

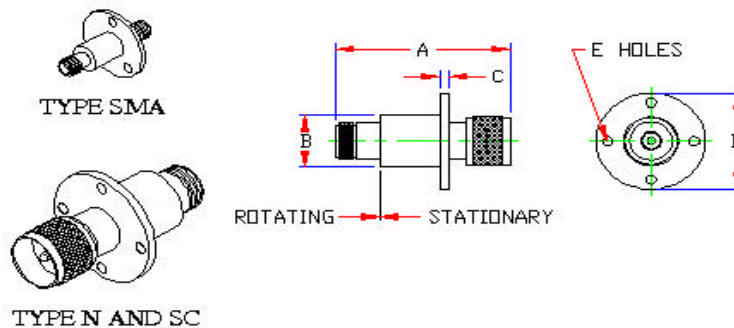

**TYPE N & SC ARE PLUG/JACK
 TYPE SMA IS JACK/JACK**

Note: Other configurations available on special request. Contact the factory with your requirements.

These Broadband Coaxial Rotary Joints feature rugged construction to withstand tough environmental conditions while delivering premium performance. If you need a special configuration or size, contact the factory with your requirements.