




1425 Highland Avenue (Rt. 10) P.O. Box 728
 Cheshire, CT 06410 - 1216 U.S.A.
 Phone # 203 - 272 - 3234
 Fax # 203 - 271 - 0352
 E - mail: Sales@microtech-inc.com
 Visit our Web site: <http://www.microtech-inc.com>

“L” STYLE ROTARY JOINT SPECIFICATIONS

TYPICAL ELECTRICAL / MECHANICAL SPECIFICATIONS								
EIA WR SIZE	MODEL No.	FREQUENCY RANGE (GHz)	VSWR Maximum	INSERTION LOSS Maximum	FLANGE EQUIV.	MATERIAL	“A” DIMENSION	“B” DIMENSION
22	233681	33.00 - 50.00	2.00	1.00	Cover	Brass	3.00	2.00
28	233682	26.50 - 40.00	2.00	1.00	Cover	Brass	3.00	2.00
42	233683	18.00 - 26.50	1.75	.75	Cover	Brass	2.50	2.00
62	233684	12.40 - 18.00	1.60	.50	Cover	Brass	2.50	1.38
75	233685	10.00 - 15.00	1.50	.40	Cover	Brass	2.50	1.38
90	233686	8.20 - 12.40	1.50	.40	Cover	Brass	2.75	1.38
112	233687	7.05 - 10.00	1.50	.40	Cover	Brass	3.25	2.00
137	233688	5.85 - 8.20	1.50	.40	CPRG	Brass	4.12	3.00
159	233689	4.90 - 7.05	1.50	.40	CPRG	Brass	5.00	3.25
187	233690	3.95 - 5.85	1.50	.40	CPRF	Brass	5.25	3.50
229	233691	3.30 - 4.90	1.50	.40	CPRG	Brass	6.50	5.00
284	233692	2.60 - 3.95	1.50	.40	CPRF	Brass	8.50	6.00
340	233693	2.20 - 3.30	1.50	.40	CPRF	Brass	9.00	6.00

Notes: Maximum VSWR WOW = .10 typical. Maximum Insertion Loss WOW = .10 dB typical. Improved VSWR values can be obtained over a reduced portion of the band.

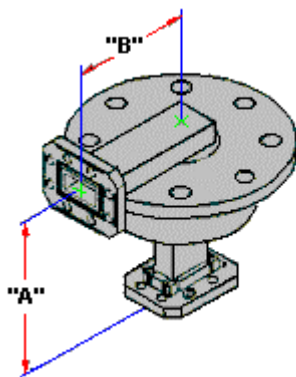

Designed for long life under extreme operating conditions, Microtech, Inc. rotary joints feature rugged construction, minimum phase WOW, stable phase linearity and designs that lend themselves to high power applications, all at a reasonable cost. If you need a special configuration or a multi-channel rotary joint just contact the factory or our area representative with your requirements. Our complete in-house engineering and production facility is at your disposal.